

MIRAGE

Truck and Bus Tire Catalog

MIRAGE



OVATION
RADIAL
PATTERN
RANGE

POSITION

ALL POSITION



STEER/TRAILER



DRIVE



TRAILER



LONG & REGIONAL HAUL

MIXED SERVICE

OFF ROAD

ROAD



MIRAGE



Long Haul



Regional Haul



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

MIRAGE



ALL POSITION



MG708

Features

- ▶ Three groove design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide outstanding wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide excellent heat dissipation



MG117

Features

- ▶ Three zigzag grooves design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide excellent wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide outstanding heat dissipation



MG599+

Features

- ▶ Four circumferential grooves
- ▶ Ladder arrangement design of longitudinal pattern
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Reduce irregular wear greatly
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	MG708	MG117	MG599+
9.00R20	144/142K		
10.00R20	149/146K		
11.00R20	152/149K		152/149J
12.00R20	154/149K		
11R22.5			
11R22.5			
12R22.5		152/149L	

MIRAGE



ALL POSITION



FAR515

Features

- ▶ Special tread compound
- ▶ Three zigzag grooves
- ▶ Special groove design
- ▶ Optimized pattern design

Benefits

- ▶ Provide outstanding resistance to abrasion
- ▶ Provide good applicability for all position
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to irregular abrasion



FAR518

Features

- ▶ Special tread compound
- ▶ Three zigzag grooves
- ▶ Special groove design
- ▶ Optimized pattern design

Benefits

- ▶ Provide outstanding resistance to abrasion
- ▶ Provide good applicability for all position
- ▶ Deliver stone-ejecting property
- ▶ Provide outstanding resistance to irregular abrasion



STEER/TRAILER



*MG330

Features

- ▶ Four wide circumferential grooves
- ▶ Special groove design
- ▶ Siped rib and shoulder design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Deliver stone-ejecting property
- ▶ Provide excellent heat dissipation



*MG660

Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Ensure excellent handling and safe performance
- ▶ Deliver lower rolling resistance



*MG606

Features

- ▶ Four zigzag grooves
- ▶ Solid shoulder design
- ▶ Variable pitch design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesiping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance



*MG606+

Features

- ▶ Four zigzag grooves
- ▶ Solid shoulder design
- ▶ Variable pitch design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesiping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance

Size	FAR515	FAR518
11R22.5	148/145L	
11R22.5	144/142M	
12R22.5	152/149L	
225/75R17.5		129/127M
245/70R17.5		136/134M
245/70R17.5		143/141J (146/146F)
245/70R19.5		136/134M
245/70R19.5		141/140J
265/70R19.5		140/138M
265/70R19.5		143/141J
285/70R19.5		146/144L
285/70R19.5		144/142M
285/70R19.5		150/148J
295/80R22.5	152/149M	
315/80R22.5	156/152K	

Size	*MG330	*MG660	MG606	MG606+
9.00R20			144/142K	
10.00R20			149/146K	
11.00R20			152/149K	
12.00R20			154/149K	
11R22.5	148/145M	148/145M	146/143M	
12R22.5	152/149M	152/149M		
13R22.5		156/152L (154/151M)		
215/75R17.5		135/133J		
255/70R22.5		140/137L		
295/80R22.5		152/148M		
315/70R22.5		154/150L		
315/80R22.5		156/152L		156/152L (154/151M)

Remarks

The symbol of "*" represents patterns applicable for all position bus.



STEER/TRAILER



MG688

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Deliver lower rolling resistance



MG111

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



MG121

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



MG123

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



STEER/TRAILER



MG124

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

Size	MG688	MG111	MG121	MG123
8.25R16LT			128/124M	
11.00R20			152/149K	152/149K
11R22.5		146/143L		
11R24.5		146/143M		
11R24.5		149/146L		
215/75R17.5		135/133J		
225/70R19.5		128/126L		
235/75R17.5		132/130M		
245/70R19.5		135/133M		
255/70R22.5		140/137L		
285/75R24.5		144/141M		
285/75R24.5		147/144L		
295/75R22.5		144/141M		
295/75R22.5		146/143L		
295/80R22.5	152/148M		152/149M	
315/70R22.5			154/150L (152/148M)	
315/80R22.5			156/152L (154/151M)	

Size	MG124
315/80R22.5	156/152L (154/151M)



DRIVE



MG122

Features

- ▶ Three circumferential grooves
- ▶ Block pattern design
- ▶ Special tread compound
- ▶ Solid shoulder design

Benefits

- ▶ Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide outstanding resistance to abrasion



MG668

Features

- ▶ Special tread compound
- ▶ Four circumferential grooves
- ▶ Deeper tread depth design
- ▶ Block pattern design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Improved mileage performance
- ▶ Provide excellent driving and braking force



MG28

Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



MG607

Features

- ▶ Four circumferential grooves
- ▶ Block pattern design
- ▶ Special tread compound
- ▶ Solid shoulder design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide outstanding resistance to abrasion



MG312

Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation



MG638

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



MG505

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance

Size	MG122	MG668	MG628
10.00R20		149/146K	
11R22.5			146/143K
12.00R24	160/157K		
12R22.5			152/149L
13R22.5			156/152L (154/151M)
215/75R17.5			135/133J
235/75R17.5			143/141J
295/80R22.5		152/148M	152/148M
315/70R22.5			154/150L (152/148M)
315/80R22.5	156/152L (154/151M)		156/152L (154/151M)

Size	MG607	MG312	MG638	MG505
10.00R20			149/146K	149/146K
11R22.5		146/143L	148/145M	
11R24.5		146/143M		
11R24.5		149/146L		
12.00R24	160/157K			
12R22.5			152/149M	
13R22.5				
285/75R24.5		144/141M		
285/75R24.5		147/144L		
295/75R22.5		144/141M		
295/75R22.5		146/143L		
295/80R22.5				
315/70R22.5			154/150L	
315/80R22.5			156/152L	



TRAILER



MG022

Features

- ▶ Four zigzag grooves
- ▶ Extra wide footprint with square shoulder
- ▶ Special tread compound

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Enhanced stability and resistance to abrasion
- ▶ Provide outstanding resistance to abrasion



MG618

Features

- ▶ Four circumferential grooves
- ▶ Special groove design
- ▶ Curved lug design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Deliver stone-ejecting property
- ▶ Deliver excellent driving and braking force



FTL311

Features

- ▶ Optimized pattern design
- ▶ Special groove design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Provide outstanding resistance to irregular abrasion
- ▶ Deliver stone-ejecting property
- ▶ Ensure excellent handling and safe performance
- ▶ Provide outstanding resistance to abrasion.
- ▶ Deliver lower rolling resistance

Size	MG022	MG618	FTL311
11R22.5		146/142M	
12R22.5		152/149M	
235/75R17.5	143/141J		
295/75R22.5		144/141M	
295/75R22.5		146/143L	
385/55R22.5			160K (158L)
385/65R22.5	160K		160K (158L)
425/65R22.5			165K
445/65R22.5			169K



Mixed Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



MG702

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



MG011

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



FAM517

Features

- Three zigzag grooves
- Combination of rib and lug design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Deliver outstanding traction and handling
- Provide excellent heat dissipation



MG307

Features

- Three zigzag grooves
- Reinforced carcass and bead design
- Special groove design
- Shoulder design with lugs

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property
- Provide excellent heat dissipation

Size	MG702	MG011	MG307
6.50R16LT	110/105K		
7.00R16LT	118/114M		
7.50R16LT	122/118M		
8.25R16LT	128/124M		
8.25R20	139/137L		
9.00R20	144/142K		
10.00R20	149/146K		149/146K
11.00R20	152/149K		152/149K
12.00R20	154/149K		154/149K
12.00R24	160/157K		
11R22.5	146/143K		
12R22.5	152/149L		152/149L
13R22.5	156/152L (154/151M)	156/152L (154/151M)	

Size	FAM517
12.00R24	160/157K
11R22.5	146/143K
12R22.5	152/149K
295/80R22.5	152/149K
315/80R22.5	156/152K



MG768

Features

- Special tread compound
- Block pattern design
- Extra wide footprint with square shoulder
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Provide excellent driving and braking force
- Enhanced stability and resistance to abrasion
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG706

Features

- Lug and block pattern design
- Special tread compound

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing



MG701

Features

- Special tread compound
- Lug and block pattern design
- Siped pattern and shoulder design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Provide excellent heat dissipation

Size	MG768	MG706	MG701
7.00R16LT		118/114M	
7.50R16LT		122/118M	
8.25R16LT		128/124L	
8.25R20		139/137L	
9.00R20		144/142K	144/142J
10.00R20	149/146K	149/146K	149/146K
11.00R20	152/149J	152/149K	152/149K
12.00R20	154/149K	154/149K	154/149K
12R22.5	152/149M		152/149M
13R22.5	156/152L (154/151M)		
315/80R22.5	156/152L (154/151M)		



MG313

Features

- Lug and block pattern design
- Special groove design
- Special tread compound
- Open shoulder design

Benefits

- Improved traction, driving and braking performance
- Deliver stone-ejecting property
- Provide outstanding resistance to puncture and tearing
- Provide excellent heat dissipation



MG729

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG322

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG303

Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, resistance to cutting and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property

Size	MG313	MG322	MG729	MG303
7.00R16LT				118/114K
7.50R16LT	122/118M			122/118J
8.25R16LT	128/124M			128/124J
8.25R20				139/137K
9.00R20	144/142K			144/142J
10.00R20	149/146K		149/146K	149/146K
11.00R20	152/149K		152/149K	152/149J
12.00R20	154/149K		154/149K	154/149K
12.00R24		160/157K	160/157K	
315/80R22.5		156/152L (154/151M)		

Mixed Service



TRAILER



Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Special groove design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Deliver stone-ejecting property



Features

- ▶ Inter-connected block pattern
- ▶ Reinforced carcass and bead design
- ▶ Special groove design

Benefits

- ▶ Provide excellent driving force, resistance to cutting and even wear
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity
- ▶ Deliver stone-ejecting property

Size	FTM313	MG303
7.00R16LT		118/114K
7.50R16LT		122/118J
8.25R16LT		128/124J
8.25R20		139/137K
9.00R20		144/142J
10.00R20		149/146K
11.00R20		152/149J
12.00R20		154/149K
385/65R22.5	160K (158L)	

MIRAGE



Off Road



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions

MIRAGE



MG168

Features

- Special tread compound
- Lug and block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



MG707

Features

- Special tread compound
- Block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG318

Features

- Lug and block pattern design
- Special tread compound

- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	MG168	MG707	MG318
7.00R16LT	118/114K		
7.50R16LT	122/118K		
8.25R16LT	128/124J		
8.25R20	139/137C		139/137C
9.00R20	144/142C		
10.00R20	149/146C	149/146K	149/146C
11.00R20		152/149K	152/149C
12.00R20		154/149K	154/149K
295/80R22.5			152/149C



MG320

Features

- Special tread compound
- Lug and block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



MG321

Features

- Lug and block pattern design
- Special tread compound
- Reinforced carcass and bead design

Benefits

- Improved traction, driving and braking performance
- Provide outstanding resistance to puncture and tearing
- Ensure outstanding handling and safe performance and provide excellent loading capacity

Size	MG320	MG321
11.00R20		152/149C
12.00R20		154/149K
295/80R22.5	152/149C	

PRODUCT RANGE




DIMENSION	MG70R	MG117	MG509+	FAR51R	FAR61R	MG230	MG660	MG606	MG606+	MG68R	MG111	MG121	MG122	MG124	MG122	MG665	MG62R	MG607	MG312	MG63R	MG605	MG622	MG61R	FTL111
8.25R16 16PR												128/124M												
9.00R20 16PR	144/142K							144/142K																
10.00R20 18PR	149/146K																							
10.00R20 18PR								149/146K								149/146K						149/146K		
11.00R20 18PR	152/149K		152/149J					152/149K				152/149K	152/149K											
12.00R20 18PR	154/149K							154/149K																
12.00R24 20PR																160/157K								
11R22.5 16PR				148/145L		148/145M	148/145M	148/145M			146/143L						146/143K		160/157K		146/143L	148/145M		146/142M
11R22.5 14PR				144/142M																				
11R24.5 14PR											146/143M										146/143M			
11R24.5 16PR											149/146L										149/146L			
12R22.5 18PR		152/149L		152/149L		152/149M	152/149M										152/149L				152/149K		152/149M	
13R22.5 20PR							156/152L (154/151M)										156/152L (154/151M)							
215/75R17.5 16PR							135/133J				135/133J						135/133J							
225/70R19.5 14PR											128/126L													
225/75R17.5 14PR					129/127M																			
235/75R17.5 16PR											132/130M						143/141J						143/141J	
245/70R17.5 16PR					136/134M																			
245/70R17.5 18PR					143/141J (146/146F)																			
245/70R19.5 16PR					136/134M						135/133M													
245/70R19.5 18PR					141/140J																			
255/70R22.5 16PR							140/137L				140/137L													
265/70R19.5 16PR					140/138M																			
265/70R19.5 18PR					143/141J																			
285/70R19.5 16PR					146/144L (144/142M)																			
285/70R19.5 18PR					150/148J																			
285/75R24.5 14PR											144/141M										144/141M			
285/75R24.5 16PR											147/144L										147/144L			
295/75R22.5 14PR											144/141M										144/141M			
295/75R22.5 16PR											146/143L										146/143L			
295/80R22.5 18PR				152/149M			152/149M			152/148M		152/149M				152/149M	152/148M							
315/70R22.5 20PR							154/150L (152/148M)					154/150L (152/148M)					154/150L (152/148M)				154/150L (152/148M)			
315/80R22.5 20PR				156/152K			156/152L (154/151M)		156/152L (154/151M)		156/152L (154/151M)		156/152L (154/151M)	156/152L (154/151M)	156/152L (154/151M)		156/152L (154/151M)				156/152L (154/151M)			
385/55R22.5 20PR																								160K(158L)
385/65R22.5 20PR																							160K	160K(158L)
425/65R22.5 20PR																								165K
445/65R22.5 20PR																								169K

PRODUCT RANGE



DIMENSION	MG702	MG011	MG303	MG307	FAM517	MG765	MG706	MG701	MG312	MG729	MG322	FTM315	MG188	MG707	MG318	NO320	MG321
6.50R16LT 12PR	110/105K																
7.00R16LT14PR	118/114M		118/114K				118/114M						118/114K				
7.50R16LT 14PR	122/118M		122/118J				122/118M		122/118M				122/118K				
8.25R16LT 16PR	128/124M		128/124J				128/124L		128/124M				128/124J				
8.25R20 16PR	139/137L		139/137K				139/137L						139/137C		139/137C		
9.00R20 16PR							144/142K	144/142J	144/142K				139/137C				
10.00R20 18PR	149/146K		149/146K	149/146K		149/146K	149/146K	149/146K	149/146K	149/146K			149/146C	149/146K	149/146C		
11.00R20 18PR	152/149K		152/149J	152/149K		152/149J	152/149K	152/149K	152/149K	152/149K				152/149K	152/149C		152/149C
12.00R20 18PR	154/149K		154/149K	154/149K		154/149K	154/149K	154/149K	154/149K	154/149K				154/149K	154/149K		154/149K
12.00R24 20PR	160/157K				160/157K					160/157K	160/157K						
11R22.5 16PR	146/143K				146/143K												
12R22.5 18PR	152/149L			152/149L	152/149K	152/149M		152/149M									
13R22.5 20PR	156/152K (154/151M)					156/152K (154/151M)											
295/80R22.5 18PR					152/149K										152/149C	152/149C	
315/80R22.5 20PR		156/152L (154/151M)			156/152K	156/152L (154/151M)					156/152L (154/151M)						
385/65R22.5 20PR												160K (158L)					

Technical File

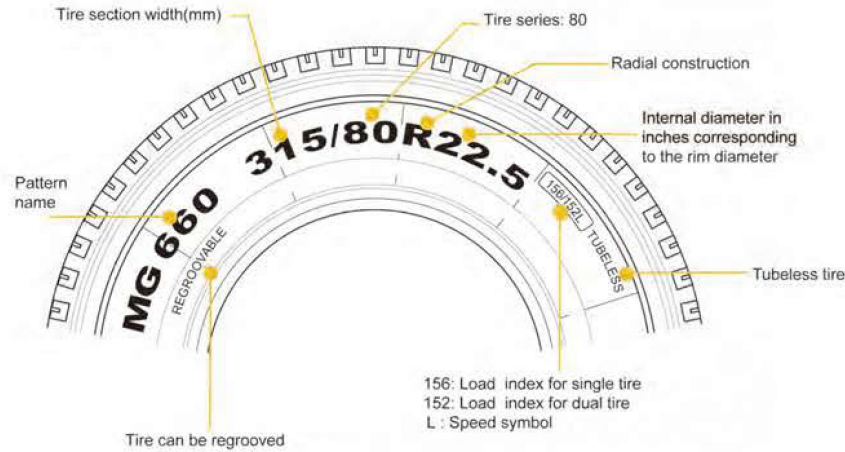

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force.

Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170

Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Tire Usage Tips

Important instructions for safe inflation

Over-inflation reduces:


- Comfort
- Grip
- Braking distance
- Tire life span, particularly on drive axle tires.
- Safety

Under-inflation leads to:

- Reduced vehicle handling and safety
- A reduction in casing retreadability
- An increase of rolling resistance consequently of fuel consumption.

Over-inflation

Under-inflation

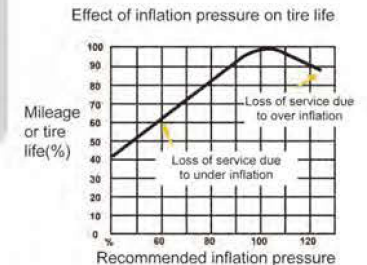

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure.
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours): pressures must be checked at regular intervals and during each service.
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire.
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert.

